


**MERIROAD**  
**RC-8240 DTG**

**For versatile crushing**

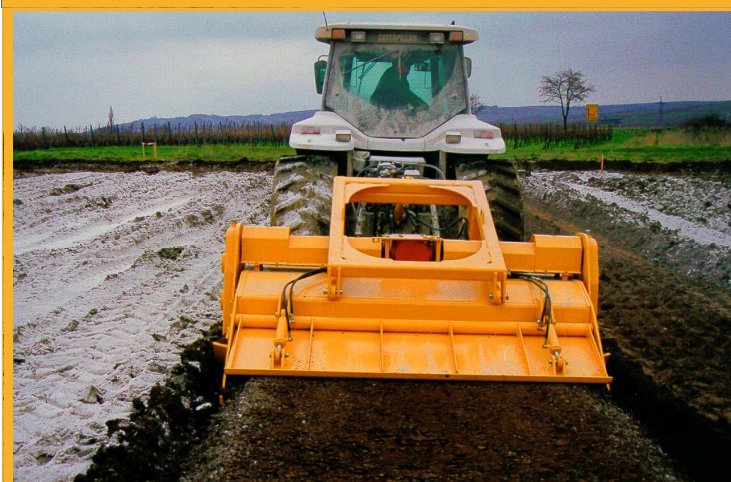

**MERIROAD**

# MERIROAD

## RC-8240 DTG

# For versatile crushing

### WORKING ENVIRONMENTS

- Crushing the ground before stabilizing,
- Preparing the subsoil for laying sett (car parks, roads, residential areas)
- Recycling of old cobbled and gravel roads, - Stabilization of grounds down to a depth of 30 cm on all types of roads, with easily accessible materials like cement, polimers, ash, dolomite, lime,
- Construction and redoing of forest roads, communal roads, drives to agricultural areas.
- Building outdoor feed pads

### EQUIPMENT

#### FEATURES

- Hardox liner (frame) bolt mounted
- STB rotor with carbide cutters
- POC - Pressure operated safety clutch (SUOKONE patented)
- hydraulic guide plate front / back
- Possibility to turn the rotor

#### OPTIONS

- Hydraulic top link

### Base machine demand

|                     |                          |
|---------------------|--------------------------|
| Four wheel tractor  |                          |
| Mounting            | KAT 3                    |
| Auxiliary hydraulic | 2 pcs. 2-way             |
| PTO                 | 1000 rpm                 |
| Working speed       | Creeper gear recommended |

### Technical data:

|                        |                  |              |
|------------------------|------------------|--------------|
| Power range            | 200 - 300 hp     |              |
| Transmission           | Mechanical PTO   |              |
| Final transmission     | Gear (G-serie)   |              |
| Clutch                 | POC-3            |              |
| Rotor diameter / width | 800 / 2435mm     | 32 / 96 inch |
| Cutter qty.            | 114 (STB-Flat)   |              |
| Working depth          | 400 mm / 16 inch |              |

### Main dimensions:

|                      |         |          |
|----------------------|---------|----------|
| Length               | 3000 mm | 118 inch |
| Width                | 2400 mm | 95 inch  |
| Height               | 1950 mm | 77 inch  |
| Weight, with options | 4170 kg | 9190 lbs |

